
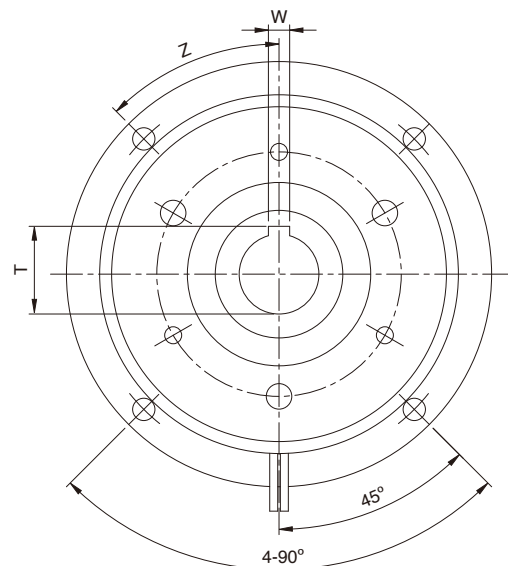
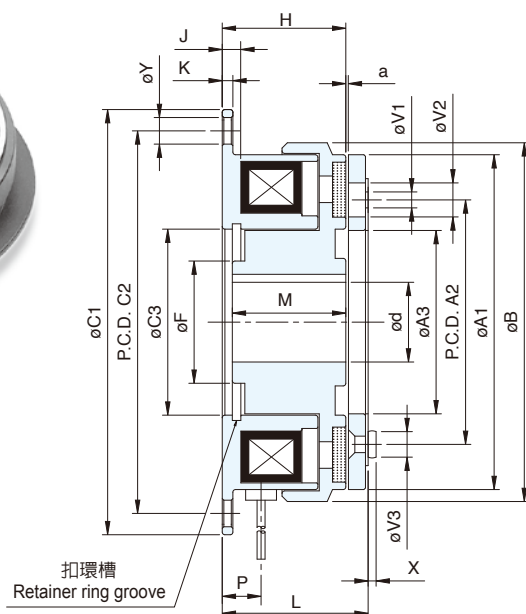


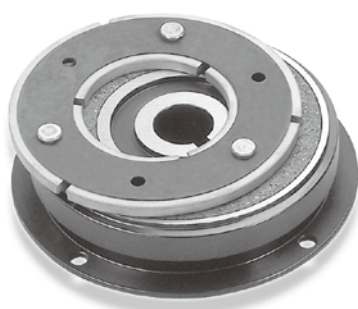

| 型 號                                            | MODEL | CDF0S6AA(AB) | CDF1S5AA(AB) | CDF2S5AA(AB) | CDF005AA(AB)     | CDF010AA(AB) | CDF020AA(AB) | CDF040AA(AB) |
|------------------------------------------------|-------|--------------|--------------|--------------|------------------|--------------|--------------|--------------|
| 靜 扭 力<br>Static Friction Torque                | Nm    | 5.5          | 11           | 22           | 45               | 90           | 175          | 350          |
| 動 扭 力<br>Dynamic Friction Torque               | Nm    | 5.0          | 10           | 20           | 40               | 80           | 160          | 320          |
| 功率 Power [24V](W) at 20°C                      |       | 11           | 15           | 20           | 25               | 35           | 45           | 60           |
| 外<br>型<br>尺<br>寸<br><br>Exterior<br>dimensions | A1    | 63           | 80           | 100          | 125              | 160          | 200          | 250          |
|                                                | A2    | 46           | 60           | 76           | 95               | 120          | 158          | 210          |
|                                                | A3    | 34.5         | 41.8         | 52           | 62               | 80           | 99.5         | 125          |
|                                                | B     | 67.5         | 85           | 106          | 133              | 169          | 212.5        | 264          |
|                                                | C1    | 80           | 100          | 125          | 150              | 190          | 230          | 290          |
|                                                | C2    | 72           | 90           | 112          | 137              | 175          | 215          | 270          |
|                                                | C3    | 35           | 42           | 52           | 62               | 80           | 100          | 125          |
|                                                | d(H7) | 15 (12)      | 20 (15)      | 25 (20)      | 30 (25)          | 40 (30)      | 50 (40)      | 60 (50)      |
|                                                | F     | 23(21)       | 28           | 40           | 45               | 62           | 77           | 100          |
|                                                | V1    | 3-3.1        | 3-4.1        | 3-5.1        | 3-6.1            | 3-8.1        | 3-10.2       | 4-12.2       |
|                                                | V2    | 3-6.3        | 3-8          | 3-12         | 3-12.5           | 3-15         | 3-17.3       | 4-20.8       |
|                                                | V3    | 3-6          | 3-6          | 3-7.5        | 3-9.8            | 3-13         | 3-18         | 4-23         |
|                                                | Y     | 5            | 6            | 7            | 7                | 9.5          | 9.5          | 11.5         |
|                                                | Z     | 6-60°        |              |              |                  |              |              | 8-45°        |
|                                                | H     | 24           | 26.5         | 30           | 33.5             | 37.5         | 44           | 51           |
|                                                | J     | 3.5          | 4.3          | 5            | 5.5              | 6            | 7            | 7.85         |
|                                                | K     | 2            | 2.5          | 3            | 3.5              | 4            | 5            | 6            |
|                                                | L     | 28.05        | 31.3         | 35.9         | 40.5             | 47           | 56.2         | 64.47        |
|                                                | M     | 22           | 24.1         | 27           | 30               | 34           | 40.15        | 47.15        |
|                                                | P     | 7.5          | 8.5          | 8.9          | 9.5              | 9.5          | 10.5         | 15.5         |
|                                                | X     | 1.5          | 1.4          | 1.7          | 2                | 2.5          | 5.7          | 6.4          |
|                                                | a     | 0.2 (±0.05)  |              |              | 0.3 (+0.05/-0.1) |              | 0.5 (0/0.2)  |              |
|                                                | W     | 5 (4)        | 5 (5)        | 7 (5)        | 7 (7)            | 10 (7)       | 12 (10)      | 15 (12)      |
|                                                | T     | 17.3(13.8)   | 22.3(17.3)   | 28.3(22.3)   | 33.3(28.3)       | 43.8(33.3)   | 53.8(43.8)   | 65.3(53.8)   |
| 重量 Weight                                      | (kg)  | 0.46         | 0.83         | 1.5          | 2.76             | 5.1          | 9.3          | 17           |
| 保護素子 Protective device                         |       | 07D470K      |              |              | 10D680K          | 14D680K      |              | 20D680K      |