


# CE2 Series

內軸承式電磁離合器 Electromagnetic Bearing - Mounted Clutch

附軸承導座 with bearing mounted hub

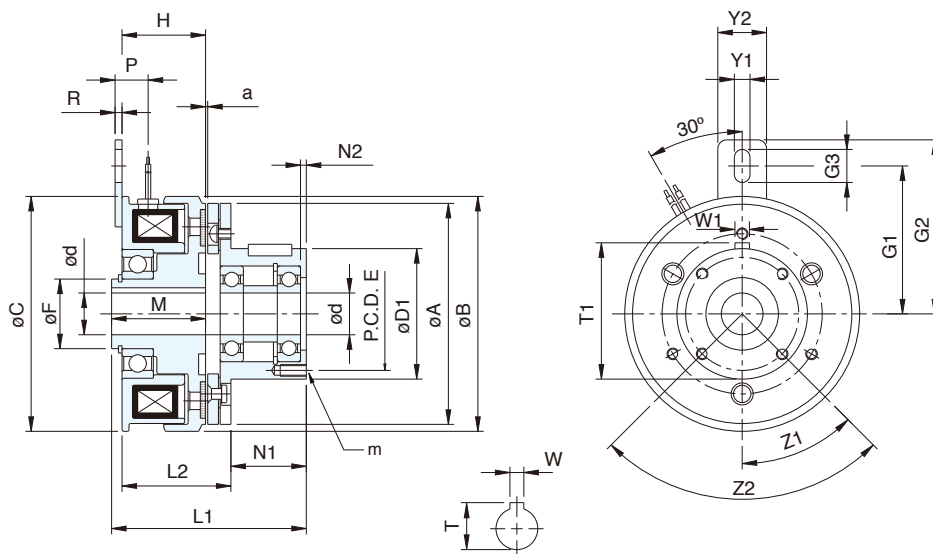

| 型 號 MODEL                                      | CE20S6AA | CE21S5AA    | CE22S5AA | CE2005AA                                 | CE2010AA |
|------------------------------------------------|----------|-------------|----------|------------------------------------------|----------|
| 靜 摩 擦 扭 力<br>Static Friction Torque (Nm)       | 5.5      | 11          | 22       | 45                                       | 90       |
| 動 摩 擦 扭 力<br>Dynamic Friction Torque (Nm)      | 5.0      | 10          | 20       | 40                                       | 80       |
| 功率 Power [24V](W) at 20°C                      | 11       | 15          | 20       | 25                                       | 35       |
| 外<br>型<br>尺<br>寸<br><br>Exterior<br>dimensions | A        | 63          | 80       | 100                                      | 125      |
|                                                | B        | 67.5        | 85       | 106                                      | 133      |
|                                                | C        | 67.5        | 85       | 106                                      | 133      |
|                                                | d(H7)    | 12          | 15       | 20                                       | 25       |
|                                                | E        | 33          | 37       | 47                                       | 52       |
|                                                | F        | 20          | 25       | 30                                       | 40       |
|                                                | H        | 24.6        | 27       | 30                                       | 33.5     |
|                                                | L1       | 54.65       | 63.25    | 74.9                                     | 91       |
|                                                | L2       | 32.15       | 35.75    | 40.9                                     | 46.8     |
|                                                | M        | 27.1        | 29.5     | 34                                       | 37.7     |
|                                                | N1       | 20          | 25       | 30                                       | 40       |
|                                                | N2       | 2           | 2.5      | 3                                        | 2        |
|                                                | P        | 9.5         | 9.5      | 9.6                                      | 9.6      |
|                                                | R        | 2           | 2        | 2                                        | 2        |
|                                                | D1(js6)  | 38          | 45       | 55                                       | 64       |
|                                                | a        | 0.2 (±0.05) |          | 0.3 ( <sup>+0.05</sup> <sub>-0.1</sub> ) |          |
|                                                | G1       | 42.75       | 55.25    | 61.75                                    | 76.3     |
|                                                | G2       | 49.50       | 63.5     | 72.5                                     | 85       |
|                                                | G3       | 9.5         | 10.5     | 11.5                                     | 11.4     |
|                                                | T1       | 39.5        | 47       | 57                                       | 67       |
|                                                | W1       | 4           | 5        | 5                                        | 7        |
|                                                | Y1       | 4.5         | 5.5      | 6.5                                      | 6.4      |
|                                                | Y2       | 12          | 14       | 16                                       | 16       |
|                                                | Z1       | 0°          |          | 45°                                      |          |
|                                                | Z2       | 3-120°      |          | 4-90°                                    |          |
|                                                | W        | 4           | 5        | 5                                        | 7        |
|                                                | T        | 13.8        | 17.3     | 22.3                                     | 28.3     |
|                                                | m        | 3-M4x6      |          | 4-M4x8                                   |          |
| 重量 Weight (kg)                                 | 0.7      | 1.23        | 2.18     | 3.93                                     | 7.1      |
| 保護素子 Protective device                         | 07D480K  |             |          | 10D680K                                  | 14D680K  |