

- > **Port size: 1/4" ... 1/2"**
(ISO G/PTF)
- > **Excelon design allows in-line or modular installation**
- > **Flow sensor provides a nearly constant oil/air ratio over a wide range of flows**
- > **All round (360°) visibility of sightfeed dome for ease of drip rate setting**



Technical features

Medium:

Compressed air only

Maximum operating pressure:

Transparent bowls:

10 bar (145 psi)

Metal bowls:

17 bar (250 psi)

Bowl:

0,1 litre

Drain:

Without standard

Manual optional

Port size:

G1/4, G3/8, G1/2,
1/4 PTF, 3/8 PTF 1/2 PTF

Flow:

Micro-fog : Start point 0,71 dm³/s,
max. 38 dm³/s at port size 3/8",
Operating pressure: 6,3 bar (91 psi)
Δp: 0,5 bar (7 psi)

Ambient/Media temperature:

Transparent bowl:

-34° ... +50°C (-30° ... +122°F)

Metal bowl:

-34° ... +80°C (-30° ... +176°F)

Air supply must be dry enough
to avoid ice formation at
temperatures below +2°C (+35°F).

Materials:

Bowl: Transparent PC alternative
transparent PC with steel guard
alternative aluminium

Body: Die cast aluminium

Sight-feed dome: Transparent PA

Elastomers: CR & NBR

Technical data L73C - Oil-fog lubricators; standard models

Symbol	Port size	Size	Pressure maximum (bar)	Drain	Bowl	Weight (kg)	Model
	G1/4	Basic	10	Without	PC (transparent)	0,50	L73C-2GP-ETN
	G3/8		10	Without	PC (transparent)	0,50	L73C-3GP-ETN
	G1/2		10	Without	PC (transparent)	0,50	L73C-4GP-ETN

Technical data L73M - Micro-fog lubricators; standard models

Symbol	Port size	Size	Pressure maximum (bar)	Drain	Bowl	Weight (kg)	Model
	G1/4	Basic	10	Without	PC (transparent)	0,50	L73M-3GP-ETN
	G3/8		10	Without	PC (transparent)	0,50	L73M-3GP-ETN
	G1/2		10	Without	PC (transparent)	0,50	L73M-4GP-ETN

Option selector



L73★-★★P-★★★

	Substitute
Oil fog lubricator	C
Micro fog lubricator	M
Port size	Substitute
1/4"	2
3/8"	3
1/2"	4
Thread form	Substitute
PTF	A
ISO G parallel (standard)	G


Option	Substitute
None (standard)	N
Quick fill nipple	Q
Bowl	Substitute
Transparent (standard)	T
Metal	D
Transparent with guard	P
Drain	Substitute
None	E
Manual (standard)	Q

Flow characteristics

Port size: G3/8

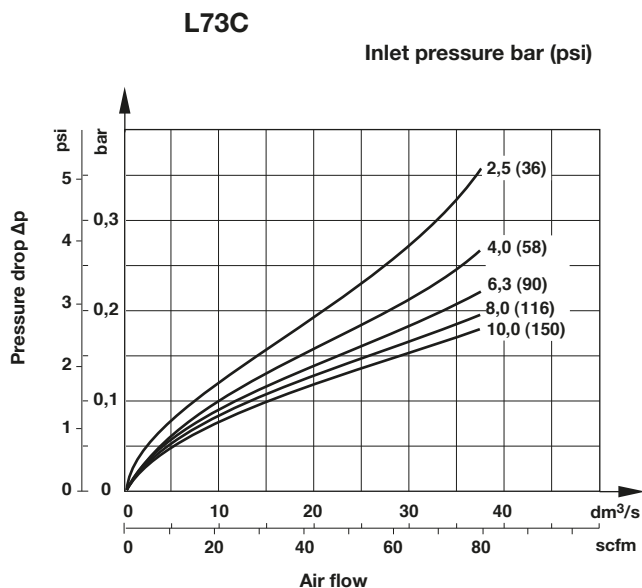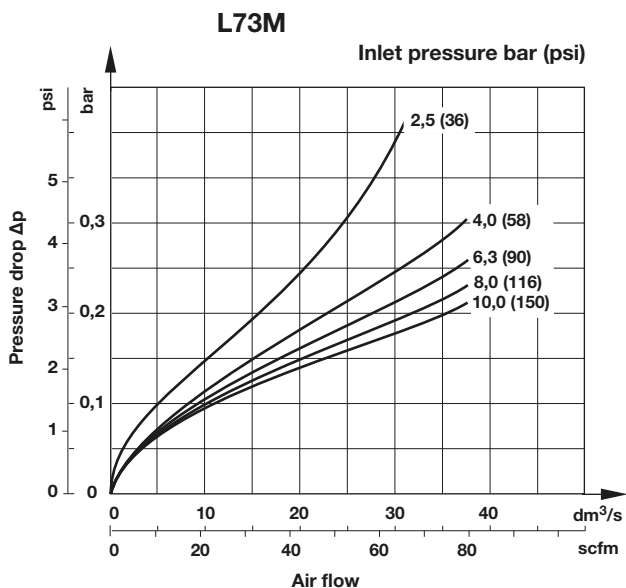

Accessories

Wall mounting bracket	Quikclamp®	Quikclamp with wall bracket®	Quikmount pipe adaptor *1)	Porting block with three alternative 1/4" ports	2/2 Shut-off valves (for full technical specification see datasheet 8.180.600)	3/2 Shut-off valves (for full technical specification see datasheet 8.180.600)
						
Page 3	Page 3	Page 3	Page 3	Page 3	Page 3	Page 3
4424-50	4314-51	4314-52	G1/4: 4315-09	G1/4: 4316-52	G1/4: T73B-2GA-P1N	G1/4: T73T-2GA-P1N
			G3/8: 4315-10	1/4 PTF: 4316-50	G3/8: T73B-3GA-P1N	G3/8: T73T-3GA-P1N
			G1/2: 4315-11		G1/2: T73B-4GA-P1N	G1/2: T73T-4GA-P1N
			1/4 PTF: 4315-01		1/4 PTF: T73B-3AA-P1N	1/4 PTF: T73T-3AA-P1N
			3/8 PTF: 4315-02		3/8 PTF: T73B-2AA-P1N	3/8 PTF: T73T-2AA-P1N
			1/2 PTF: 4315-03		1/2 PTF: T73B-4AA-P1N	1/2 PTF: T73T-4AA-P1N

*1) Please use a Quikmount pipe adaptor if the Quikclamp be mounted at inlet or outlet side.

Pressure switch

Porting block for pressure switch



Page 3

0523110000000000


Pressure switch (0,5 ... 8 bar)



0881300000000000

Padlock

Padlock (brass) with two keys *1)



0613633000000000

*1) for shut-off valves

Service kits

Service kit




L73M-KIT

L73C-KIT

Drawings

Dimensions in mm
Projection/First angle

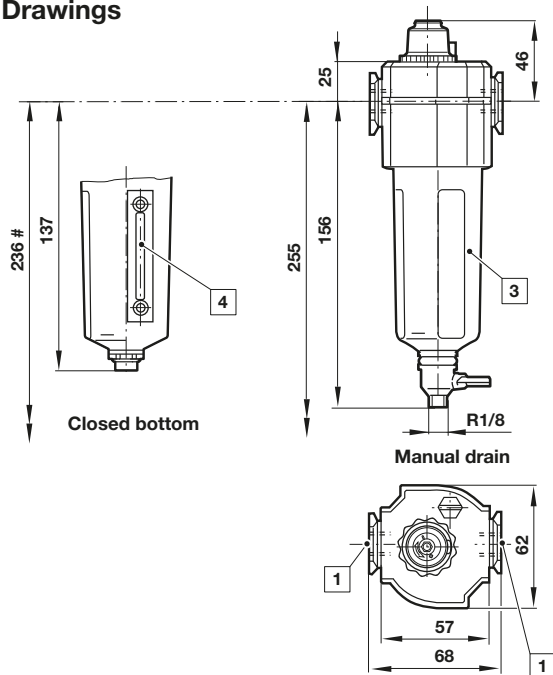

Minimum clearance required to remove bowl


1 Main ports 1/4", 3/8" or 1/2"

3 Transparent bowl with or without guard


4 Metal bowl with liquid level indicator lens

Accessories


Quikclamp®

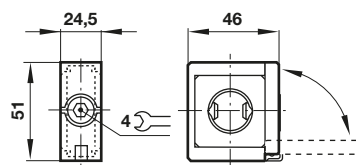


Quikclamp® with wall bracket

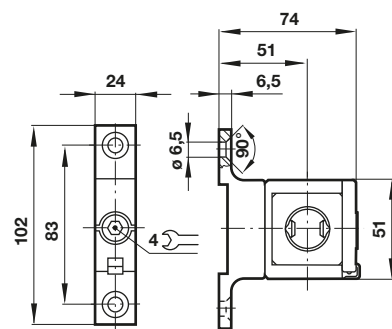

Porting block




Pipe adapter



1 Main ports 3/8", 1/2" or 3/4"
ISO G/PTF


10 Ports 1/4" ISO G/PTF plugged

Wall mounting bracket

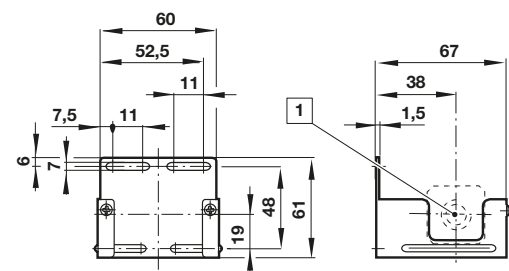

1 Main ports


Shut-off valves

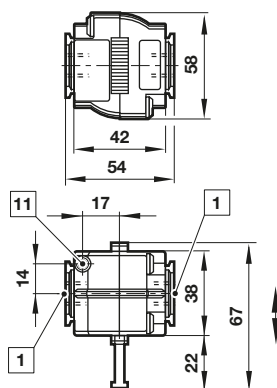

1 Main ports 1/4", 3/8" or 1/2" ISO G/PTF

11 Exhaust port M5 at 3/2 valve only

Porting block for pressure switch

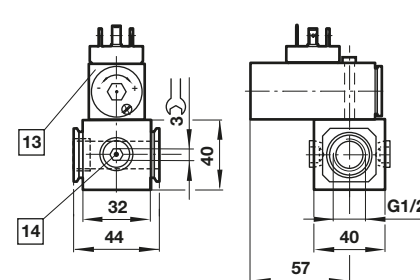

13 Pressure switch is not in scope of delivery

14 Alternative G1/4 ports plugged

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under

»Technical features/data«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult IMI Precision Engineering, Norgren Inc.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.