



PSPT Series

PRESSURE TRANSDUCER REFERENCE GUIDE
SD-362 / 82022




Pressure Transducer Nomenclature

EXAMPLE:

PSPT	0150	S	V	S	P	-	S	D
PARKER SPORLAN PRESSURE TRANSDUCER	RANGE 0000 = NA 0150 = 0-150 0300 = 0-300 0500 = 0-500 0652 = 0-652 2000 = 0-2000	TYPE 0 = NA S = Sealed G = Gauge A = Absolute	SIGNAL 0 = NA V = .5 -to 4.5 VR	HARDWARE C = Cable S = 1/4" SAE N = 1/8" NPT	CONNECTOR P = Packard	CABLE -- = None 20 = 2 m 50 = 5 m	MATERIAL S = Stainless	MODEL D

Dimensions

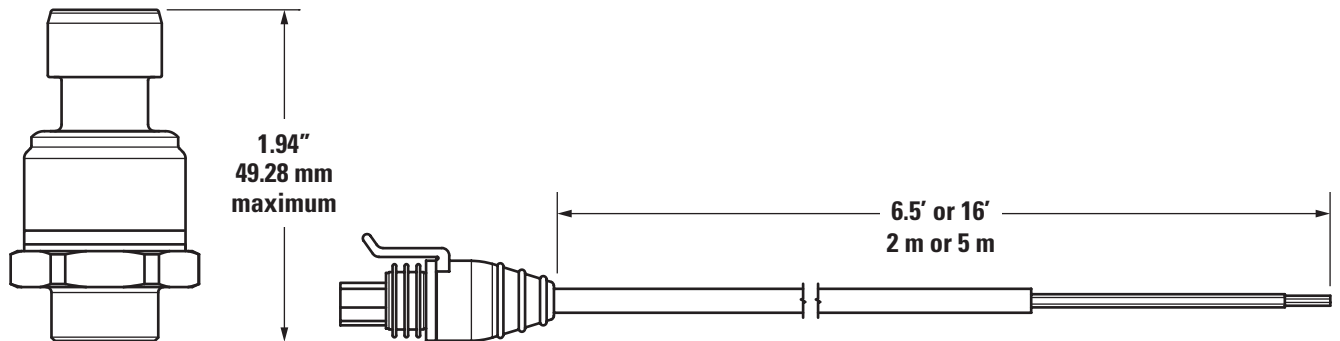

PRESSURE TRANSDUCER

TRANSDUCER CABLE

PARKER SPORLAN PRESSURE TRANSDUCERS (Partial List)			
DESCRIPTION	ITEM	NOTES	LABEL COLOR
PSPT0150AVSP-SD	993291	0-150 psia (10 bar) transducer	Silver
PSPT0150SVSP-SD	992572	0-150 psis (10 bar) transducer (all other refrigerants)	Green
PSPT0300SVSP-SD	992574	0-300 psis (21 bar) transducer (R410A)	White
PSPT0500SVSP-SD	992576	0-500 psis (34 bar) transducer (R744)	Yellow
PSPT0652SVSP-SD	992579	0-652 psis (45 bar) transducer	Pink
TRANSDUCER CABLES			
DESCRIPTION	ITEM	NOTES	
PSPT000000CP20	953192	6.5' (2 meter) cable	
PSPT000000CP50	953100	16' (5 meter) cable	

