



SQM5 gear side with drive shaft no. 7



SQM5 rear side, design without a second drive shaft end



SQM5 rear side, design with 2 drive shaft ends

## Actuators for Air and Gas Dampers

with electronic modules

## SQM5...

- 
- Electromotive actuator with up to 40 Nm torque
  - Clockwise and counterclockwise variants
  - Running times from 10 to 90 seconds
  - Different shaft designs available
  - With 1 or 2 drive shaft ends, drive shafts interchangeable or available separately
  - Can be equipped with electronic modules for control and position feedback signal via steady signals
  - Internal and external position indication
  - Drive shaft and camshaft can be disengaged separately
  - Variants with UL certification

The SQM5... and this Data Sheet are intended for use by OEMs which integrate the SQM5... in their products!

## Use

---

The SQM5 actuators are designed to drive air and gas dampers. Areas of application are oil and gas burners of medium to larger capacity.

The actuators are used primarily for the load-dependent control of the gas flow, oil volume and combustion air volume:

- In connection with 3-position or modulating controllers (e.g. 4...20 mA), and/or
- Directly by burner controls

## Supplementary documentation

---

| Product type | Type of documentation | Documentation number |
|--------------|-----------------------|----------------------|
| ASZ...       | Data sheet            | N7921                |
| AGA56...     | Data sheet            | N7922                |

## Warning notes

---



**To avoid injury to persons, damage to property or the environment, the following warning notes must be observed!**

**Only qualified staff may open, interfere with or modify the actuators!**

- Read the documentation on the actuators carefully and fully. If not observed, dangerous situations can occur
- The user must ensure that the actuators meet the requirements of the relevant application standards
- All product-related activities (mounting, settings and maintenance) must be performed by qualified and authorized personnel



### **Caution!**

- Risk of electric shock – to disconnect the equipment from the power, it may be necessary to open more than one switch. Before performing maintenance work, the equipment must be disconnected from the power supply
  - The electrical connection between the conduit fittings is not made automatically. It must be established on the installation site
  - The connecting plate is made of plastic and does not provide earthing of the conduit fittings. Earthing must be ensured by adequate washers and wire links
  - All cam switch settings must satisfy the requirements of the relevant application standards
- 
- To ensure protection against electric shock, the connection terminals must have adequate protection. Make certain that non-insulated connections or wires cannot be touched
  - Each time work has been carried out (mounting, installation, service work, etc.), check to ensure that wiring is in an orderly state
  - Fall or shock can adversely affect the safety functions. Such actuators must not be put into operation even if they do not exhibit any damage
  - Static charges must be avoided since they can damage the electronic components on contact.
- Recommendation:** Use ESD equipment

## Notes on use in North America

- Only flexible conduits with relevant accessories may be used
- Only copper conductors may be used
- All Class 2 circuits must be wired with CL3, CL3R, CL3P or equivalent cables  
OR  
All circuits are wired according to Class 1 (electric light or power circuits)

## Mounting notes

---

- Ensure that the relevant national safety regulations are complied with
- In the geographical areas where DIN regulations are in use, the requirements of VDE must be complied with, especially DIN/VDE 0100, 0550 and DIN/VDE 0722
- Make certain that the actuator is not exposed to direct solar radiation
- Tightening torques
  - Cover screws: 3.5 Nm
  - Connecting cover: 2 Nm

- Ensure that the electrical wiring is in compliance with national and local regulations
- Make certain that strain relief of the connected cables is in compliance with the relevant standards  
(e.g. in accordance with DIN EN 60730 and DIN EN 60335)
- Ensure that spliced wires cannot come into contact with neighboring terminals. Use suitable ferrules
- SQM5 terminals that are not used must be protected by dummy plugs
- When wiring the unit, separation between the 120 V AC or 230 V AC range and the other voltage ranges must be maintained in order to ensure protection against electric shock
- The connection between the actuator drive shaft and the relevant controlling element must be form-fitted
- Only plastic versions of cable glands may be used

## Standards and certificates

---



### Applied directives:

- Low-voltage directive 2014/35/EC
- Electromagnetic compatibility EMC (immunity) 2014/30/EC

Compliance with the regulations of the applied directives is verified by the adherence to the following standards / regulations:

- Automatic electrical controls for household and similar use Part 1: General requirements DIN EN 60730-1
- Automatic electrical controls for household and similar use Part 2-14: Particular requirements for electric actuators DIN EN 60730-2-14

**The relevant valid edition of the standards can be found in the declaration of conformity!**



EAC Conformity mark (Eurasian Conformity mark)



ISO 9001:2015  
ISO 14001:2015  
OHSAS 18001:2007



China RoHS  
Hazardous substances table:  
<http://www.siemens.com/download?A6V10883536>



For use in the U.S. / Canada, the actuators carry type suffix «R» (see example) and are

UL- and CSA-listed.

Example: SQM50.480**R**1

## Lifetime

---

The actuator has a designed lifetime\* of 250,000 burner startup cycles (OFF ⇒ ON ⇒ OFF) under load with the rated torque in the entire rotation angle range, which under normal operating conditions in heating mode corresponds to approx. 10 years of service (starting from the production date given on the nameplate). This is based on the endurance tests specified in the standard EN 298.

A summary of the conditions has been published by the European Control Manufacturers Association (Afecon) ([www.afecor.org](http://www.afecor.org)).

The lifetime is based on use of the actuator according to the manufacturer's data sheet. After reaching the designed lifetime in terms of the number of burner startup cycles, or after the corresponding usage time, the actuator must be replaced by authorized personnel.

\*The designed lifetime is not the warranty time specified in the Terms of Delivery

## Disposal notes


---

The actuator contains electrical and electronic components and must not be disposed of together with domestic waste.

Local and currently valid legislation must be observed.


## Mechanical design

- |             |                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Housing     | <ul style="list-style-type: none"><li>• Housing sections made of die-cast aluminium</li><li>• Covers made of impact-proof and heat-resistant plastic</li></ul>                                                                                                                                                                                                                                                                               |
| Drive motor | <ul style="list-style-type: none"><li>• Synchronous motor</li></ul>                                                                                                                                                                                                                                                                                                                                                                          |
| Couplings   | <ul style="list-style-type: none"><li>• Driven shaft and cam shaft can be adjusted via 2 separately couplers, independent of the gear train</li><li>• Shaft can be manually disengaged from the gear and motor by operating the coupling (coupling pin (Kx), refer to <i>Technical data</i>)</li><li>• Automatic reengagement</li><li>• Coupling pin (K1 and K2)</li><li>• Separation of gear and camshaft using coupling pin (K1)</li></ul> |

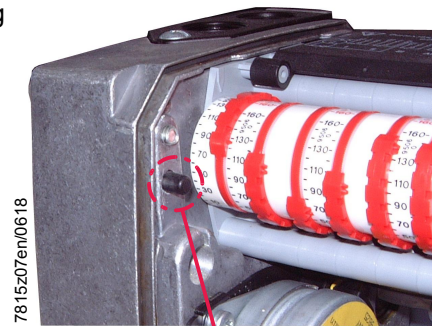

Coupling pin "K1"

- Separation of drive shaft and gear using coupling pin (K2)

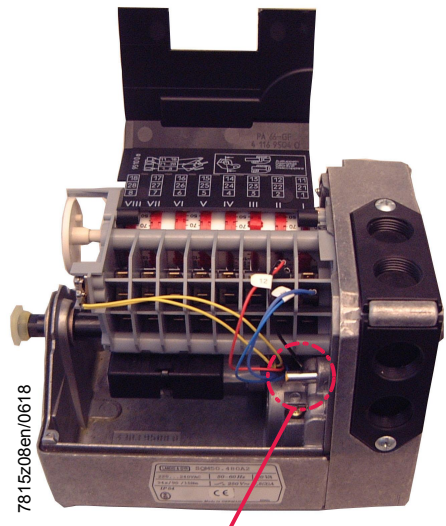

Coupling pin "K2"

- |                                |                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cam shaft drive                | <ul style="list-style-type: none"><li>• Backlash-free gearing</li></ul>                                                                                                                                                                                                                                                                                                                            |
| Adjustment of switching points | <ul style="list-style-type: none"><li>• Via rotating cams</li><li>• Scales adjacent to the cams indicate the angle of the switching point</li></ul>                                                                                                                                                                                                                                                |
| Position indication            | <ul style="list-style-type: none"><li>• Internally:<ul style="list-style-type: none"><li>– Scale at the end of the drive shaft</li><li>– Black scale for counterclockwise rotation, single arrow on the cam</li><li>– Red scale for clockwise rotation, double arrow on the cam</li></ul></li><li>• Externally:<ul style="list-style-type: none"><li>– Scale in viewing window</li></ul></li></ul> |

## Mechanical design (cont'd)

---

|                        |                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrical connections | <ul style="list-style-type: none"><li>• Blade terminal on micro switch</li><li>• Screw terminals for «N» and «PE»</li><li>• Subassembly and fixing of wiring by means of removable Pg plastic insert possible</li><li>• Easy introduction of cables through large openings in the housing</li><li>• Fixing of Pg insert with all cables by means of a screw</li></ul> |
| Gear train             | <ul style="list-style-type: none"><li>• Maintenance-free gearwheels and bearings</li></ul>                                                                                                                                                                                                                                                                            |
| Drive shaft            | <ul style="list-style-type: none"><li>• Secured with a removable circlip</li><li>• Easily exchangeable</li><li>• With corresponding shaft both sides transmission possible</li><li>• Different shaft designs available</li></ul>                                                                                                                                      |
| Actuator fixing        | <ul style="list-style-type: none"><li>• Fixing holes on the front of the housing and at the bottom</li><li>• Front fixing also possible from inside the housing</li><li>• Variable mounting height through the use of an extra adapter</li></ul>                                                                                                                      |

## Type summary (other types are available on request)

Actuators with premounted accessories are only available on request.

### AC 220 V -15% ... AC 240 V +10%, 50...60 Hz ±6%

| Standard types!<br>(other versions on request) |               | Torque and<br>holding torque<br>3) | Running time at<br>50 Hz for<br>angular rotation<br>1) |      | Auxiliary<br>switches incl.<br>2 end<br>switches | Type of shaft     | Electronic<br>module<br>(integrated ex<br>works)<br>5) | Potentiometer<br>(integrated ex<br>works)<br>6) |
|------------------------------------------------|---------------|------------------------------------|--------------------------------------------------------|------|--------------------------------------------------|-------------------|--------------------------------------------------------|-------------------------------------------------|
| Article no.                                    | Type          | Max. Nm 2)                         | 90°                                                    | 130° | Piece                                            | AGA...            | AGA...                                                 | ASZ...                                          |
| BPZ:SQM50.260A2G4                              | SQM50.260A2G4 | 10                                 | 10 s                                                   | 14 s | 4                                                | --- <sup>4)</sup> | 56.41A27                                               | 12.33                                           |
| S55452-D401-A100                               | SQM50.260A2Z3 | 10                                 | 10 s                                                   | 14 s | 4                                                | --- <sup>4)</sup> | 56.9Ax7                                                | 12.30                                           |
| BPZ:SQM50.341A2                                | SQM50.341A2   | 10                                 | 15 s                                                   | 22 s | 4                                                | 58.1              | ---                                                    | ---                                             |
| BPZ:SQM50.341A2G3                              | SQM50.341A2G3 | 10                                 | 15 s                                                   | ---  | 4                                                | 58.1              | 56.41A27                                               | 12.30                                           |
| BPZ:SQM50.341A2K3                              | SQM50.341A2K3 | 10                                 | 15 s                                                   | ---  | 4                                                | 58.1              | 56.43A27                                               | 12.30                                           |
| BPZ:SQM50.380A2                                | SQM50.380A2   | 15                                 | 15 s                                                   | 22 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| BPZ:SQM50.381A2                                | SQM50.381A2   | 10                                 | 15 s                                                   | 22 s | 8                                                | 58.1              | ---                                                    | ---                                             |
| BPZ:SQM50.381A2G3                              | SQM50.381A2G3 | 10                                 | 15 s                                                   | ---  | 8                                                | 58.1              | 56.41A27                                               | 12.30                                           |
| BPZ:SQM50.387A2                                | SQM50.387A2   | 15                                 | 15 s                                                   | 22 s | 8                                                | 58.7              | ---                                                    | ---                                             |
| BPZ:SQM50.387A2G3                              | SQM50.387A2G3 | 15                                 | 15 s                                                   | ---  | 8                                                | 58.7              | 56.41A27                                               | 12.30                                           |
| BPZ:SQM50.424A2Z7                              | SQM50.424A2Z7 | 15                                 | 34 s                                                   | ---  | 2                                                | 58.4              | 56.9A27                                                | 12.30                                           |
| BPZ:SQM50.441A2                                | SQM50.441A2   | 10                                 | 34 s                                                   | 49 s | 4                                                | 58.1              | ---                                                    | ---                                             |
| BPZ:SQM50.441A2G3                              | SQM50.441A2G3 | 10                                 | 34 s                                                   | ---  | 4                                                | 58.1              | 56.41A27                                               | 12.30                                           |
| BPZ:SQM50.441A2Z3                              | SQM50.441A2Z3 | 10                                 | 34 s                                                   | ---  | 4                                                | 58.1              | 56.9A27                                                | 12.30                                           |
| BPZ:SQM50.480A2                                | SQM50.480A2   | 15                                 | 34 s                                                   | 49 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| BPZ:SQM50.480A2G3                              | SQM50.480A2G3 | 15                                 | 34 s                                                   | ---  | 8                                                | --- <sup>4)</sup> | 56.41A27                                               | 12.30                                           |
| BPZ:SQM50.480A2Z3                              | SQM50.480A2Z3 | 15                                 | 34 s                                                   | ---  | 8                                                | --- <sup>4)</sup> | 56.9A27                                                | 12.30                                           |
| BPZ:SQM50.481A2                                | SQM50.481A2   | 10                                 | 34 s                                                   | 49 s | 8                                                | 58.1              | ---                                                    | ---                                             |
| BPZ:SQM50.481A2G3                              | SQM50.481A2G3 | 10                                 | 34 s                                                   | ---  | 8                                                | 58.1              | 56.41A27                                               | 12.30                                           |
| BPZ:SQM50.481A2Z3                              | SQM50.481A2Z3 | 10                                 | 34 s                                                   | ---  | 8                                                | 58.1              | 56.9A27                                                | 12.30                                           |
| BPZ:SQM50.482A2                                | SQM50.482A2   | 15                                 | 34 s                                                   | 49 s | 8                                                | 58.2              | ---                                                    | ---                                             |
| BPZ:SQM50.482A2Z3                              | SQM50.482A2Z3 | 15                                 | 34 s                                                   | ---  | 8                                                | 58.2              | 56.9A27                                                | 12.30                                           |

| Standard types!<br>(other versions on request) |                      | Torque and<br>holding torque<br>3) | Running time at<br>50 Hz for<br>angular rotation<br>1) |      | Auxiliary<br>switches incl.<br>2 end<br>switches | Type of shaft     | Electronic<br>module<br>(integrated ex<br>works)<br>5) | Potentiometer<br>(integrated ex<br>works)<br>6) |
|------------------------------------------------|----------------------|------------------------------------|--------------------------------------------------------|------|--------------------------------------------------|-------------------|--------------------------------------------------------|-------------------------------------------------|
| Article no.                                    | Type                 | Max. Nm 2)                         | 90°                                                    | 130° | Piece                                            | AGA...            | AGA...                                                 | ASZ...                                          |
| <b>BPZ:SQM50.483A2</b>                         | <b>SQM50.483A2</b>   | 15                                 | 34 s                                                   | 49 s | 8                                                | <b>58.3</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM50.483A2Z3</b>                       | <b>SQM50.483A2Z3</b> | 15                                 | 30 s                                                   | 43 s | 8                                                | <b>58.3</b>       | <b>56.9A27</b>                                         | <b>12.30</b>                                    |
| <b>BPZ:SQM50.681A2</b>                         | <b>SQM50.681A2</b>   | 10                                 | 68 s                                                   | 98 s | 8                                                | <b>58.1</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM53.442A2</b>                         | <b>SQM53.442A2</b>   | 25                                 | 30 s                                                   | 43 s | 4                                                | <b>58.2</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM53.482A2</b>                         | <b>SQM53.482A2</b>   | 20                                 | 30 s                                                   | 43 s | 8                                                | <b>58.2</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM53.482A2G4</b>                       | <b>SQM53.482A2G4</b> | 20                                 | 30 s                                                   | ---  | 8                                                | <b>58.2</b>       | <b>56.41A27</b>                                        | <b>12.33</b>                                    |
| <b>BPZ:SQM53.482A2Z3</b>                       | <b>SQM53.482A2Z3</b> | 20                                 | 30 s                                                   | ---  | 8                                                | <b>58.2</b>       | 56.9A27                                                | <b>12.30</b>                                    |
| <b>BPZ:SQM53.489A2</b>                         | <b>SQM53.489A2</b>   | 25                                 | 30 s                                                   | 43 s | 8                                                | <b>58.9</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM53.582A2</b>                         | <b>SQM53.582A2</b>   | 20                                 | 45 s                                                   | 65 s | 8                                                | <b>58.2</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM54.480A2</b>                         | <b>SQM54.480A2</b>   | 25                                 | 30 s                                                   | 43 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM54.482A2</b>                         | <b>SQM54.482A2</b>   | 20                                 | 30 s                                                   | 43 s | 8                                                | <b>58.2</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM54.482A2Z3</b>                       | <b>SQM54.482A2Z3</b> | 20                                 | 30 s                                                   | 43 s | 8                                                | <b>58.2</b>       | <b>56.9A27</b>                                         | <b>12.30</b>                                    |
| <b>BPZ:SQM54.580A2</b>                         | <b>SQM54.580A2</b>   | 25                                 | 45 s                                                   | 65 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM56.680A2</b>                         | <b>SQM56.680A2</b>   | 40                                 | 60 s                                                   | 87 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM56.684A2G4</b>                       | <b>SQM56.684A2G4</b> | 30                                 | 60 s                                                   | 87 s | 8                                                | <b>58.4</b>       | 56.41A27                                               | <b>12.33</b>                                    |
| <b>BPZ:SQM56.684A2Z3</b>                       | <b>SQM56.684A2Z3</b> | 30                                 | 60 s                                                   | ---  | 8                                                | <b>58.4</b>       | 56.9A27                                                | <b>12.30</b>                                    |
| <b>BPZ:SQM56.687A2</b>                         | <b>SQM56.687A2</b>   | 40                                 | 60 s                                                   | 87 s | 8                                                | <b>58.7</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM56.687A2G3</b>                       | <b>SQM56.687A2G3</b> | 40                                 | 60 s                                                   | ---  | 8                                                | <b>58.7</b>       | 56.41A27                                               | <b>12.30</b>                                    |
| <b>BPZ:SQM56.687A2Z3</b>                       | <b>SQM56.687A2Z3</b> | 40                                 | 60 s                                                   | ---  | 8                                                | <b>58.7</b>       | 56.9A27                                                | <b>12.30</b>                                    |

**Type summary** (other types are available on request)

**AC 110 V -15%/+10%, 50...60 Hz ±6%**

| Standard types!<br>(other versions on request) |                      | Torque and<br>holding torque<br>3) | Running time at<br>50 Hz for<br>angular rotation<br>1) |      | Auxiliary<br>switches incl.<br>2 end<br>switches | Type of shaft     | Electronic<br>module<br>(integrated ex<br>works)<br>5) | Potentiometer<br>(integrated ex<br>works)<br>6) |
|------------------------------------------------|----------------------|------------------------------------|--------------------------------------------------------|------|--------------------------------------------------|-------------------|--------------------------------------------------------|-------------------------------------------------|
| Article no.                                    | Type                 | Max. Nm 2)                         | 90°                                                    | 130° | Piece                                            | AGA...            | AGA...                                                 | ASZ...                                          |
| <b>BPZ:SQM50.380A1</b>                         | <b>SQM50.380A1</b>   | 10                                 | 15 s                                                   | 22 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM50.454A1</b>                         | <b>SQM50.454A1</b>   | 15                                 | 34 s                                                   | 49 s | 5                                                | <b>58.4</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM50.480A1</b>                         | <b>SQM50.480A1</b>   | 15                                 | 34 s                                                   | 49 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM50.480A1Z3</b>                       | <b>SQM50.480A1Z3</b> | 15                                 | 34 s                                                   | ---  | 8                                                | --- <sup>4)</sup> | 56.9A17                                                | <b>12.30</b>                                    |
| <b>BPZ:SQM50.483A1Z3</b>                       | <b>SQM50.483A1Z3</b> | 15                                 | 30 s                                                   | ---  | 8                                                | <b>58.3</b>       | 56.9A17                                                | <b>12.30</b>                                    |
| <b>BPZ:SQM50.680A1</b>                         | <b>SQM50.680A1</b>   | 15                                 | 68 s                                                   | 98 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM53.480A1</b>                         | <b>SQM53.480A1</b>   | 25                                 | 30 s                                                   | 43 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM53.482A1</b>                         | <b>SQM53.482A1</b>   | 20                                 | 30 s                                                   | 43 s | 8                                                | <b>58.2</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM53.482A1Z3</b>                       | <b>SQM53.482A1Z3</b> | 20                                 | 30 s                                                   | ---  | 8                                                | <b>58.2</b>       | 56.9A17                                                | <b>12.30</b>                                    |
| <b>BPZ:SQM53.580A1</b>                         | <b>SQM53.580A1</b>   | 25                                 | 45 s                                                   | 65 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM54.482A1</b>                         | <b>SQM54.482A1</b>   | 20                                 | 30 s                                                   | 43 s | 8                                                | <b>58.2</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM56.680A1</b>                         | <b>SQM56.680A1</b>   | 40                                 | 60 s                                                   | 87 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM56.687A1</b>                         | <b>SQM56.687A1</b>   | 40                                 | 60 s                                                   | 87 s | 8                                                | <b>58.7</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM56.687A1Z3</b>                       | <b>SQM56.687A1Z3</b> | 40                                 | 60 s                                                   | ---  | 8                                                | <b>58.7</b>       | 56.9A17                                                | <b>12.30</b>                                    |

**Type summary** (other types are available on request)

**AC 24 V -15/+10%, 50...60 Hz ±6%**

| Standard types!<br>(other versions on request) |                      | Torque and<br>holding torque<br>3) | Running time at<br>50 Hz for<br>angular rotation<br>1) |      | Auxiliary<br>switches incl.<br>2 end<br>switches | Type of shaft     | Electronic<br>module<br>(integrated ex<br>works)<br>5) | Potentiometer<br>(integrated ex<br>works)<br>6) |
|------------------------------------------------|----------------------|------------------------------------|--------------------------------------------------------|------|--------------------------------------------------|-------------------|--------------------------------------------------------|-------------------------------------------------|
| Article no.                                    | Type                 | Max. Nm 2)                         | 90°                                                    | 130° | Piece                                            | AGA...            | AGA...                                                 | ASZ...                                          |
| <b>BPZ:SQM50.380A8</b>                         | <b>SQM50.380A8</b>   | 15                                 | 15 s                                                   | 22 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM50.454A8</b>                         | <b>SQM50.454A8</b>   | 15                                 | 34 s                                                   | 49 s | 5                                                | <b>58.4</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM50.480A8</b>                         | <b>SQM50.480A8</b>   | 15                                 | 34 s                                                   | 49 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM50.480A8Z3</b>                       | <b>SQM50.480A8Z3</b> | 15                                 | 34 s                                                   | ---  | 8                                                | --- <sup>4)</sup> | 56.9A87                                                | <b>12.30</b>                                    |
| <b>BPZ:SQM50.483A8</b>                         | <b>SQM50.483A8</b>   | 15                                 | 34 s                                                   | 49 s | 8                                                | <b>58.3</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM50.483A8Z3</b>                       | <b>SQM50.483A8Z3</b> | 15                                 | 34 s                                                   | ---  | 8                                                | <b>58.3</b>       | 56.9A87                                                | <b>12.30</b>                                    |
| <b>BPZ:SQM50.543A8</b>                         | <b>SQM50.543A8</b>   | 15                                 | 45 s                                                   | 65 s | 4                                                | <b>58.3</b>       | ---                                                    | ---                                             |
| <b>BPZ:SQM50.680A8</b>                         | <b>SQM50.680A8</b>   | 15                                 | 60 s                                                   | 87 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM53.480A8</b>                         | <b>SQM53.480A8</b>   | 25                                 | 30 s                                                   | 43 s | 8                                                | --- <sup>4)</sup> | ---                                                    | ---                                             |
| <b>BPZ:SQM56.687A8</b>                         | <b>SQM56.687A8</b>   | 40                                 | 60 s                                                   | 87 s | 8                                                | <b>58.7</b>       | ---                                                    | ---                                             |

**Type summary** (other types are available on request)

**AC 110 V -15%/+10%, 60 Hz ±6%, UL-registered**

| Standard types!<br>(other versions on request) |                       | Torque and<br>holding torque<br>3) | Running time at<br>50 Hz for<br>angular rotation<br>1) |      | Auxiliary<br>switches incl.<br>2 end<br>switches | Type of shaft | Electronic<br>module<br>(integrated ex<br>works)<br>5) | Potentiometer<br>(integrated ex<br>works)<br>6) |
|------------------------------------------------|-----------------------|------------------------------------|--------------------------------------------------------|------|--------------------------------------------------|---------------|--------------------------------------------------------|-------------------------------------------------|
| Article no.                                    | Type                  | Max. Nm 2)                         | 90°                                                    | 130° | Piece                                            | AGA...        | AGA...                                                 | ASZ...                                          |
| <b>BPZ:SQM50.260R1</b>                         | <b>SQM50.260R1</b>    | 15                                 | 8 s                                                    | 12 s | 6                                                | --- 4)        | ---                                                    | ---                                             |
| <b>BPZ:SQM50.260R1G4</b>                       | <b>SQM50.260R1G4</b>  | 15                                 | 8 s                                                    | 12 s | 6                                                | --- 4)        | <b>56.41A17</b>                                        | <b>12.33</b>                                    |
| <b>BPZ:SQM50.360R1</b>                         | <b>SQM50.360R1</b>    | 15                                 | 12 s                                                   | 18 s | 6                                                | --- 4)        | ---                                                    | ---                                             |
| <b>BPZ:SQM50.361R1G3</b>                       | <b>SQM50.361R1G3</b>  | 10                                 | 12 s                                                   | ---  | 6                                                | <b>58.1</b>   | <b>56.41A17</b>                                        | <b>12.30</b>                                    |
| <b>BPZ:SQM50.361R1G4</b>                       | <b>SQM50.361R1G4</b>  | 10                                 | 12 s                                                   | 18 s | 6                                                | <b>58.1</b>   | <b>56.41A17</b>                                        | <b>12.33</b>                                    |
| <b>BPZ:SQM50.364R1G3</b>                       | <b>SQM50.364R1G3</b>  | 15                                 | 12 s                                                   | ---  | 6                                                | <b>58.4</b>   | <b>56.41A17</b>                                        | <b>12.30</b>                                    |
| <b>BPZ:SQM50.367R1G3</b>                       | <b>SQM50.367R1G3</b>  | 10                                 | 12 s                                                   | ---  | 6                                                | <b>58.7</b>   | <b>56.41A17</b>                                        | <b>12.30</b>                                    |
| <b>BPZ:SQM50.450R1G3</b>                       | <b>SQM50.450R1G3</b>  | 15                                 | 28 s                                                   | ---  | 5                                                | --- 4)        | <b>56.41A17</b>                                        | <b>12.30</b>                                    |
| <b>BPZ:SQM50.460R1</b>                         | <b>SQM50.460R1</b>    | 15                                 | 28 s                                                   | 41 s | 6                                                | --- 4)        | ---                                                    | ---                                             |
| <b>BPZ:SQM50.464R1G3R</b>                      | <b>SQM50.464R1G3R</b> | 15                                 | 34 s                                                   | ---  | 6                                                | <b>58.4</b>   | <b>56.41A17</b>                                        | <b>12.30</b>                                    |
| <b>BPZ:SQM50.480R1</b>                         | <b>SQM50.480R1</b>    | 15                                 | 28 s                                                   | 41 s | 8                                                | --- 4)        | ---                                                    | ---                                             |
| <b>BPZ:SQM50.480R1Z3</b>                       | <b>SQM50.480R1Z3</b>  | 15                                 | 28 s                                                   | ---  | 8                                                | --- 4)        | <b>56.9A17</b>                                         | <b>12.30</b>                                    |
| <b>BPZ:SQM50.481R1</b>                         | <b>SQM50.481R1</b>    | 10                                 | 28 s                                                   | 41 s | 8                                                | <b>58.1</b>   | ---                                                    | ---                                             |
| <b>BPZ:SQM53.460R1</b>                         | <b>SQM53.460R1</b>    | 25                                 | 28 s                                                   | 36 s | 6                                                | --- 4)        | ---                                                    | ---                                             |
| <b>BPZ:SQM53.480R1G3</b>                       | <b>SQM53.480R1G3</b>  | 25                                 | 28 s                                                   | ---  | 8                                                | --- 4)        | <b>56.41A17</b>                                        | <b>12.30</b>                                    |
| <b>BPZ:SQM53.480R1Z3</b>                       | <b>SQM53.480R1Z3</b>  | 25                                 | 28 s                                                   | ---  | 8                                                | --- 4)        | <b>56.9A17</b>                                         | <b>12.30</b>                                    |
| <b>BPZ:SQM54.560R1</b>                         | <b>SQM54.560R1</b>    | 25                                 | 27 s                                                   | 54 s | 6                                                | --- 4)        | ---                                                    | ---                                             |
| <b>BPZ:SQM54.560R1A</b>                        | <b>SQM54.560R1A</b>   | 25                                 | 37 s                                                   | 54 s | 6                                                | --- 4)        | <b>56.1A97</b>                                         | ---                                             |
| <b>BPZ:SQM56.560R1</b>                         | <b>SQM56.560R1</b>    | 40                                 | 37 s                                                   | 54 s | 6                                                | --- 4)        | ---                                                    | ---                                             |
| <b>BPZ:SQM56.560R1G4</b>                       | <b>SQM56.560R1G4</b>  | 40                                 | 37 s                                                   | 54 s | 6                                                | <b>58.1</b>   | <b>56.41A17</b>                                        | <b>12.33</b>                                    |
| <b>BPZ:SQM56.660R1</b>                         | <b>SQM56.660R1</b>    | 40                                 | 50 s                                                   | 72 s | 6                                                | --- 4)        | ---                                                    | ---                                             |

| Standard types!<br>(other versions on request) |                      | Torque and<br>holding torque<br>3) | Running time at<br>50 Hz for<br>angular rotation<br>1) |      | Auxiliary<br>switches incl.<br>2 end<br>switches | Type of shaft | Electronic<br>module<br>(integrated ex<br>works)<br>5) | Potentiometer<br>(integrated ex<br>works)<br>6) |
|------------------------------------------------|----------------------|------------------------------------|--------------------------------------------------------|------|--------------------------------------------------|---------------|--------------------------------------------------------|-------------------------------------------------|
| Article no.                                    | Type                 | Max. Nm 2)                         | 90°                                                    | 130° | Piece                                            | AGA...        | AGA...                                                 | ASZ...                                          |
| <b>BPZ:SQM56.680R1G3</b>                       | <b>SQM56.680R1G3</b> | 40                                 | 50 s                                                   | ---  | 8                                                | --- 4)        | <b>56.41A17</b>                                        | <b>12.30</b>                                    |
| <b>BPZ:SQM56.680R1Z3</b>                       | <b>SQM56.680R1Z3</b> | 40                                 | 50 s                                                   | ---  | 8                                                | --- 4)        | <b>56.9A17</b>                                         | <b>12.803</b>                                   |
| <b>BPZ:SQM56.687R1</b>                         | <b>SQM56.687R1</b>   | 40                                 | 50 s                                                   | 87 s | 8                                                | <b>58.7</b>   | ---                                                    | ---                                             |

**Type summary** (other types are available on request)

**AC 24 V -15/+10%, 50...60 Hz  $\pm 6\%$ , UL-registered**

| Standard types!<br>(other versions on request) |                      | Torque and<br>holding torque<br>3) | Running time at<br>50 Hz for<br>angular rotation<br>1) |      | Auxiliary<br>switches incl.<br>2 end<br>switches | Type of shaft | Electronic<br>module<br>(integrated ex<br>works)<br>5) | Potentiometer<br>(integrated ex<br>works)<br>6) |
|------------------------------------------------|----------------------|------------------------------------|--------------------------------------------------------|------|--------------------------------------------------|---------------|--------------------------------------------------------|-------------------------------------------------|
| Article no.                                    | Type                 | Max. Nm 2)                         | 90°                                                    | 130° | Piece                                            | AGA...        | AGA...                                                 | ASZ...                                          |
| <b>BPZ:SQM50.450R8G3</b>                       | <b>SQM50.450R8G3</b> | 15                                 | 34 s                                                   | ---  | 5                                                | --- 4)        | 56.41A87                                               | <b>12.30</b>                                    |
| <b>BPZ:SQM50.460R8</b>                         | <b>SQM50.460R8</b>   | 15                                 | 34 s                                                   | 49 s | 6                                                | --- 4)        | 56.41A87                                               | ---                                             |

The actuators are

- also meet CE requirements
- are of the same basic design as the equivalent standard types

1) At 60 Hz frequency, running times are about 17 % shorter

2) Based on 250,000 position changes

3) See drive shafts and torques depending on the voltage

4) Order drive shaft separately

5) For details, refer to Data Sheet N7922

6) For details, refer to Data Sheet N7921

## Accessories (must be ordered separately)

---



Proportional controlling element with mounting plate **VKP**

- Proportional controlling element for mounting between threaded flanges in gas trains
- Refer to Data Sheet N7632.



Mounting plate **ASK33.3**

Article no.: **BPZ:ASK33.3**

- For mounting the SQM5 onto the VKP proportional controlling element using only the AGA58.5 drive shaft.
- Refer to Mounting Instruction 74 319 0843 0 (M7646)



Mounting kit **ASK33.9**

Article no.: **BPZ:ASK33.9**

- For mounting the SQM5 onto butterfly valve VKF41.xxxC using only the AGA58.1 drive shaft
- Refer to Mounting Instruction 4 319 9535 0 (M7815.4)



Pg insert **AGA55.2**

Article no.: **BPZ:AGA55.2**

Inclusive sealing and screw, for SQM5.



Kit for shaft seal **AGA55.5**

Article no.: **BPZ:AGA55.5**



- For sealing the shaft feed through and therewith for perfecting the degree of protection
- On both sides shaft seals for actuator SQM5
- Packed as kit together with O-rings inclusive mounting screws
- Refer to Mounting Instruction M7815.5 (74 319 0577 0)



Spacer **AGA57.1**

Article no.: **BPZ:AGA57.1**

- Adapter for SQM10 / SQM20
- Refer to Mounting Instruction M7815.1 (4 319 9529 0)




Adapter for actuator ME8 **AGA57.2**  
Article no.: **BPZ:AGA57.2**

Refer to Mounting Instruction M7815.2 (4 319 9536 0).



Adapter for Honeywell Mod. III actuator **AGA57.3**  
Article no.: **BPZ:AGA57.3**

Refer to Mounting Instruction M7815.2 (4 319 9536 0).



Electronic modules **AGA56**

- For control of the actuator
- Modular installable, complete with mounting frame and fixing screws
- See for **AGA56.1x** Data Sheet N7922 and Mounting Instruction M7922.3 (4 319 9602 0)
- See for **AGA56.4x** Data Sheet N7922 and Mounting Instruction M7922.2 (4 319 9542 0)
- See for **AGA56.9x** Data Sheet N7922 and Mounting Instruction M7922.1 (4 319 9532 0)



Potentiometers **ASZ**

- **ASZxx.3x** refer to Mounting Instruction M7921 (4 319 9604 0)
- **ASZxx.7xx** refer to Mounting Instruction M7806/M7808/M7812 (4 319 2263 0)
- **ASZxx.8xx** refer to Mounting Instruction M7806/M7808/M7812 (4 319 2263 0)
- **ASZxx.9xx** refer to Mounting Instruction M7806/M7808/M7812 (4 319 2263 0)
- Refer to Data Sheet N7921

**Auxiliary (must be ordered separately) (continued)**



| Drive shafts                                                                                                          | Max. torque | Type no. | Order no.              |                    |
|-----------------------------------------------------------------------------------------------------------------------|-------------|----------|------------------------|--------------------|
|                                                                                                                       |             |          | Article no.            | Type               |
| <b>10 mm dia., single-sided</b> , Woodruff key to DIN 6888, equivalent to drive shaft of SQM10...                     | 10 Nm       | 1        | <b>BPZ:AGA58.1</b>     | <b>AGA58.1</b>     |
| <b>10 mm dia., single-sided</b> , Woodruff key to DIN 6888, equivalent to drive shaft of SQM10..., packs of 10 pieces | 10 Nm       | 1        | <b>BPZ:AGA58.1(10)</b> | <b>AGA58.1(10)</b> |
| <b>12 mm dia., single-sided</b> , Woodruff key to DIN 6888, equivalent to drive shaft of SQM20...                     | 20 Nm       | 2        | <b>BPZ:AGA58.2</b>     | <b>AGA58.2</b>     |
| <b>9 mm square, double-sided</b> , equivalent to drive shaft of ME8                                                   | 25 Nm       | 3        | <b>BPZ:AGA58.3</b>     | <b>AGA58.3</b>     |
| <b>9.5 mm square, double-sided</b> , equivalent to drive shaft of Honeywell Mod. III                                  | 30 Nm       | 4        | <b>BPZ:AGA58.4</b>     | <b>AGA58.4</b>     |
| <b>9.5 mm square, double-sided</b> , equivalent to drive shaft of Honeywell Mod. III, packs of 10 pieces              | 30 Nm       | 4        | <b>BPZ:AGA58.4(10)</b> | <b>AGA58.4(10)</b> |
| <b>Ø 10 mm on one side, D-shaped shaft end</b>                                                                        | 10 Nm       | 5        | <b>BPZ:AGA58.5</b>     | <b>AGA58.5</b>     |
| <b>Ø 10 mm gear side, Ø 9.5 mm rear side</b> , DIN 6888 Woodruff key, corresponds to shaft on Honeywell Mod. SQM10    | 10 Nm       | 6        | <b>BPZ:AGA58.6</b>     | <b>AGA58.6</b>     |
| <b>14 mm dia., single-sided with parallel key</b> to DIN 6885, mandatory with SQM56...                                | 40 Nm       | 7        | <b>BPZ:AGA58.7</b>     | <b>AGA58.7</b>     |
| <b>14 mm dia., single-sided with parallel key</b> to DIN 6885, mandatory with SQM56..., packs of 10 pieces            | 40 Nm       | 7        | <b>BPZ:AGA58.7(10)</b> | <b>AGA58.7(10)</b> |
| <b>12 mm square, single-sided</b>                                                                                     | 30 Nm       | 9        | <b>BPZ:AGA58.9</b>     | <b>AGA58.9</b>     |

Refer to Mounting Instruction M7815.3 (4 319 9534 0).

## Technical data

|                   |                                                                                  |                                                                                                                                                                                                           |
|-------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General unit data | Kind of current                                                                  | AC                                                                                                                                                                                                        |
|                   | Operating voltage and operating frequency                                        | Refer to «Type summary»                                                                                                                                                                                   |
|                   | Drive motor                                                                      | Synchronous motor                                                                                                                                                                                         |
|                   | Power consumption                                                                | 20 VA                                                                                                                                                                                                     |
|                   | Angular rotation                                                                 | Between 0° and max. 160° (scale range)                                                                                                                                                                    |
|                   | Mounting position                                                                | Optional                                                                                                                                                                                                  |
|                   | Degree of protection                                                             | IP54 (provided knockout holes remain closed for mounting or are closed off, with adequate cable entries)                                                                                                  |
|                   | Safety class                                                                     | I                                                                                                                                                                                                         |
|                   | External overload fuse                                                           | Max. 6.3 AT (slow), to DIN EN 60127-2/5                                                                                                                                                                   |
|                   | Internal overload fuse                                                           | Max. 2 AT (slow), depending on the type                                                                                                                                                                   |
|                   | Cable entry                                                                      | 4 x Pg13.5 with thread                                                                                                                                                                                    |
|                   | Wire cross-sectional area of the connecting wires, including earth terminal (PE) | 0.5...2.5 mm <sup>2</sup>                                                                                                                                                                                 |
|                   | Direction of rotation                                                            | Facing the gear train side: counterclockwise or clockwise (selectable), delivery: <b>counterclockwise</b>                                                                                                 |
|                   | Torque                                                                           | See the <i>Torques</i> diagram and <i>Drive shafts</i> accessories                                                                                                                                        |
|                   | Holding torque                                                                   | Max. torque                                                                                                                                                                                               |
|                   | Running time                                                                     | 10...90 s (refer to «Type summary») <sup>1)</sup>                                                                                                                                                         |
|                   | Pause time at change in direction of rotation                                    | > 100 ms                                                                                                                                                                                                  |
|                   | End and auxiliary switches                                                       |                                                                                                                                                                                                           |
|                   | - Type                                                                           | To DIN 41636                                                                                                                                                                                              |
|                   | - Switching voltage                                                              | AC 24...250 V                                                                                                                                                                                             |
|                   | - Switching capacity                                                             | To CEE 24 / VDE 0630<br>7.5 (3) A, AC 250 V                                                                                                                                                               |
|                   | Number of end switches                                                           | 2                                                                                                                                                                                                         |
|                   | Number of auxiliary switches                                                     | Max. 6, depending on the type                                                                                                                                                                             |
|                   | Drive shaft                                                                      | Replaceable                                                                                                                                                                                               |
|                   | Weight                                                                           | Approx. 3.3 kg                                                                                                                                                                                            |
|                   | Temperature of the mounting surface                                              | Max. 60 °C                                                                                                                                                                                                |
|                   | Lifecycle                                                                        | 250,000 start cycles (OFF ⇌ ON ⇌ OFF) under load with the rated torque in the entire rotation angle range.<br>2,000,000 control cycles under load with 75% of rated torque in rotation angle range of 10° |

- 1) Specifications apply to ambient temperatures of 23 °C and a mains voltage of 120 V AC or 230 V AC and a mains frequency of 50 Hz. With a mains frequency of 60 Hz, the running times are approx. 20% shorter.  
Torques lower by the same rate.

## Technical data (cont'd)

|                          |                                               |                              |
|--------------------------|-----------------------------------------------|------------------------------|
| Environmental conditions | <b>Storage</b>                                | DIN EN 60721-3-1             |
|                          | Climatic conditions                           | Class 1K2                    |
|                          | Mechanical conditions                         | Class 1M2                    |
|                          | Temperature range without integrated AGA56... | -50...+60 °C                 |
|                          | Humidity                                      | <95 % r.h.                   |
|                          | <b>Transport</b>                              | DIN EN 60721-3-2             |
|                          | Climatic conditions                           | Class 2K2                    |
|                          | Mechanical conditions                         | Class 2M2                    |
|                          | Temperature range without integrated AGA56... | -50...+60 °C                 |
|                          | Humidity                                      | <95 % r.h.                   |
|                          | <b>Operation</b>                              | DIN EN 60721-3-3             |
|                          | Climatic conditions                           | Class 3K3                    |
|                          | Mechanical conditions                         | Class 3M3                    |
|                          | Temperature range without integrated AGA56... | -20...+60 °C                 |
|                          | Humidity                                      | <95 % r.h.                   |
|                          | Installation altitude                         | Max. 2,000 m above sea level |




### Caution!

**Condensation, formation of ice and ingress of water are not permitted!**  
**Failure to observe this poses a risk of damaging the safety functions and the risk of electric shock.**

## Technical data (cont'd)

|                                  |                                                    |                                                                                       |
|----------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|
| Conductive plastic potentiometer | Resistance                                         | 2*1000 $\Omega$ double potentiometer<br>Maximum rotation angle, depending on the type |
|                                  | Operating voltage                                  | 10 V DC                                                                               |
|                                  | Permissible hysteresis                             | 0.3% of 90° or of 135°, depending on the type                                         |
|                                  | Total resistance tolerance                         | $\pm 20\%$                                                                            |
|                                  | Effective rotation angle                           | 90° or 135°                                                                           |
|                                  | Connection terminal strip                          | 3-pole                                                                                |
|                                  | For a wire cross-section of ...                    | 0.5...1 mm <sup>2</sup>                                                               |
|                                  | Wiper current rating                               | Max. 100 $\mu$ A                                                                      |
|                                  | Transfer resistance of the wiper contact           | Max. $R_{ü} \leq 100 \Omega$                                                          |
|                                  | Linearity (based on $R_{ges} = 1000 \Omega$ )      | $\pm 1\%$                                                                             |
|                                  | Sleekness ( $\alpha = 10^\circ$ ) / microlinearity | < 0.5%                                                                                |
|                                  | Lifetime                                           | Approx. 2 million actuation cycles                                                    |

### Connection diagram

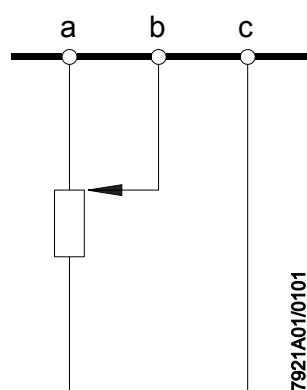

Potentiometer displayed in start position.

Terminal markings:

a = pickup at end of potentiometer

b = potentiometer wiper


c = pickup at end of potentiometer

Apply operating voltage to «a» and «c».


Conductive plastic potentiometers can be destroyed if operating voltage is applied between «a → b» or «b → c».

## Torques


SQM50...

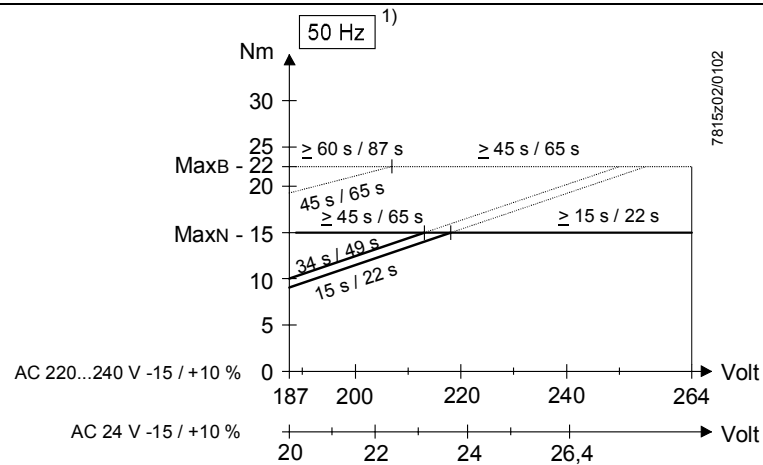

SQM53... / SQM54...

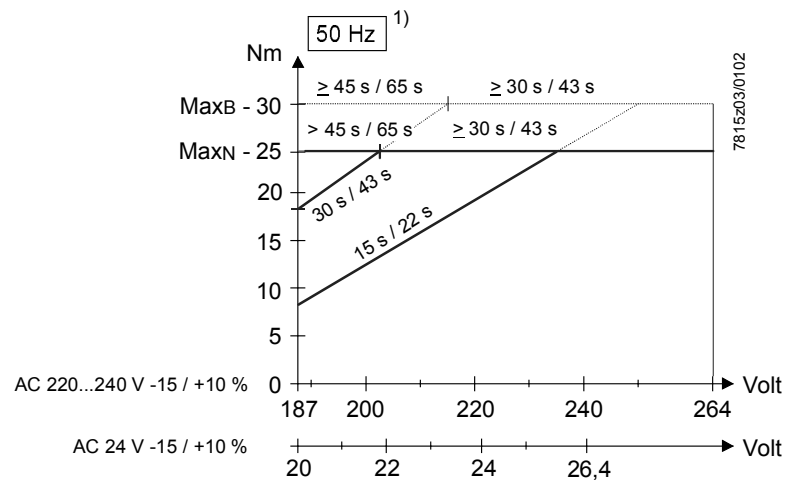

SQM56...

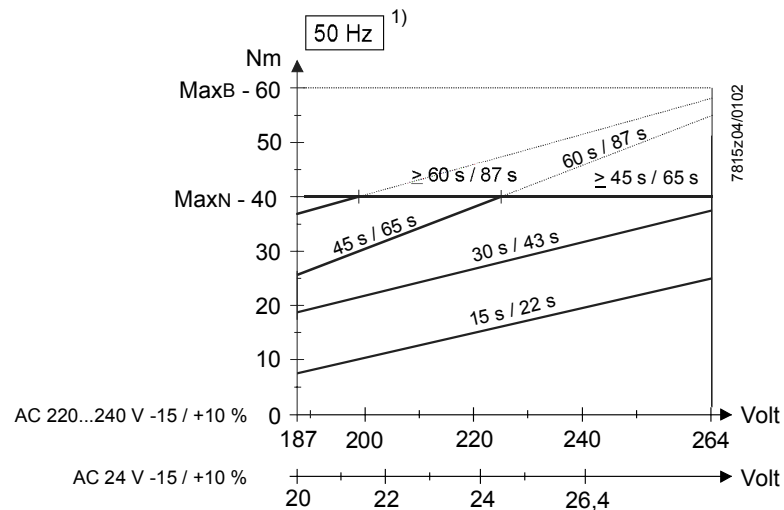

Legend

1) At 60 Hz frequency, running times are about 17 % shorter and torques are proportionally lower



### Note!

Each drive side is capable of delivering the maximum torque, but the total torque of both sides must not exceed the maximum permissible torque of actuator.

With appropriate running time for 90° / 130°:

—— Torque in continuous operation

----- Release or starting torque = short-time torque

MaxN Max. permissible torque in continuous operation for all running times

MaxB Max. permissible release or starting torque for all running times


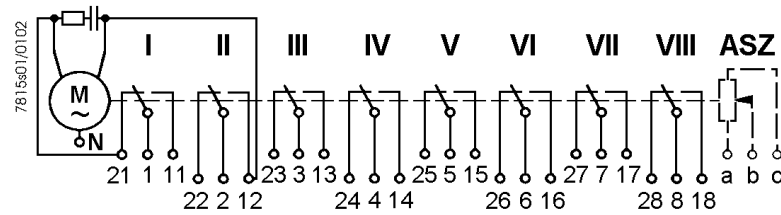


Diagram shows the maximum number of switches (2 end and 6 auxiliary switches).  
On versions with fewer than 6 auxiliary switches, the higher numbers are not used. For example, the actuator version with 2 end and 2 auxiliary switches does not use switches V, VI, VII and VIII.


## Direction of rotation

By exchanging the 2 motor connecting cables, the actuator's direction of rotation can be changed from counterclockwise to clockwise.

Counterclockwise rotation

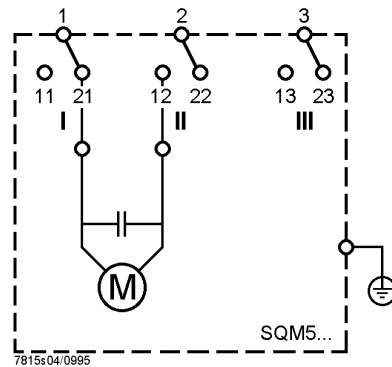

Clockwise rotation

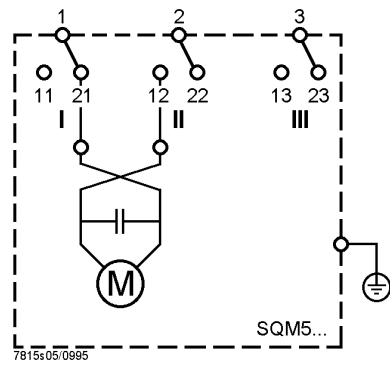

### Note!

When changing the direction of rotation from counterclockwise to clockwise, the cams must be readjusted.



### Clockwise rotation:

Red scales on the cam shaft, double arrow on the cams.

### Counterclockwise rotation:


Black scales on the cam shaft, single arrow on the cams.



### Note!

Ensure correct direction of rotation!

Delivery state: Counterclockwise

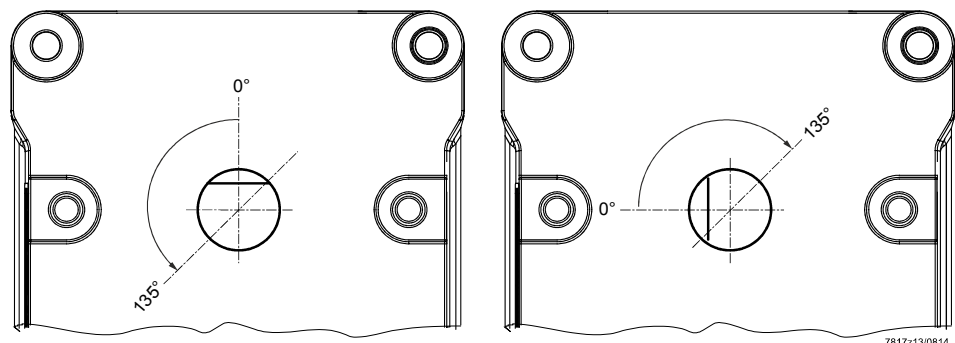


## Dimensions

Dimensions in mm

SQM5...

- 1) Identical with fixing points SQM1... / SQM2...

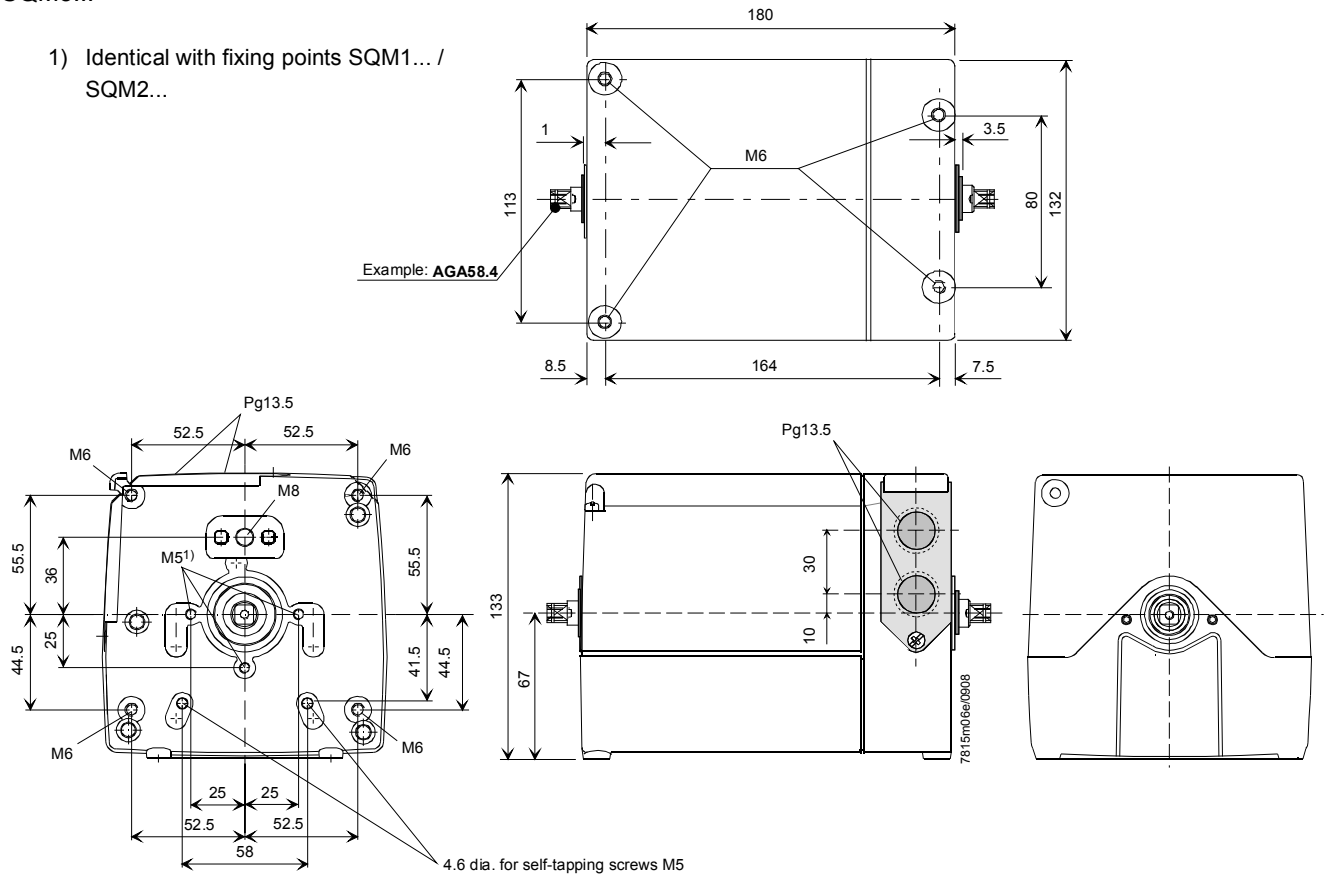

Technical drawing of the AGA58 series of valves, showing front, side, and end views for models AGA58.1 through AGA58.9. The drawing includes detailed dimensions in millimeters and identifies the valve body material as 7815m07/1113.

**Dimensions (mm):**

- Overall length: 180
- AGA58.1: 25.5, 20, 9, 11.2, 10, 3
- AGA58.2: 25.5, 20, 9, 13.2, 12, 3
- AGA58.3: 20.5, 9, 21.5, 11, 9, 3
- AGA58.4: 17, 10.6, 19.8, 10.6, 2.5, 1.3, 9.5, 12
- AGA58.5: 17, 10.6, 19.8, 10.6, 2.5, 1.3, 9.5, 12
- AGA58.6: 17, 10.6, 19.8, 10.6, 2.5, 1.3, 9.5, 12
- AGA58.7: 43.5, 28, 5, 15.1, 14, 5
- AGA58.8: 25.5, 15, 12, 14
- AGA58.9: 25.5, 15, 12, 14


**Connections:**

- AGA58.1, AGA58.2: 1/2" NPT
- AGA58.3, AGA58.4, AGA58.7: 1/2" NPT
- AGA58.5: 1/2" NPT
- AGA58.6: 1/2" NPT
- AGA58.8: 1/2" NPT
- AGA58.9: 1/2" NPT


**Material:** 7815m07/1113

Dimensions in mm

AGA57.1



AGA57.2

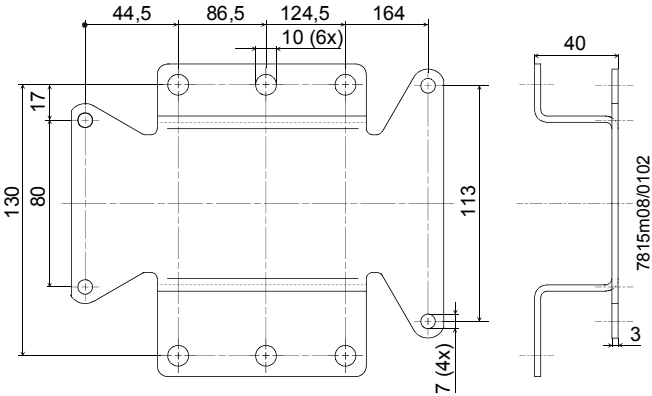

AGA57.3

